



REMOTE CONTROL FOR COLOR CHANGING PANELS

SKU 8066

Instruction:

1. Matching Code and Group: Remote only can be used after matching code with driver, method is as below:


I. Connect driver with load and power, choose the lights which need to grouping, turn off the power for 10 seconds, and restart power, press relevant button (Within 3 seconds)  (A) in the same time, this group of lights will slow flash 3 times to confirm that matching and group successful.

II. Repeat above steps until grouping complete,

III. Remark: each driver only can be matched with one group of light in same remote, one remote can be matched with many drivers, but one driver maximum can be matched with 4 remotes at same time.

2. Clear code and regroup: If the room layout changes, or changes in preferences, you can clear old setting and regroup. Please clear old led light code before regroup, way is as below:

I. Select the lights which need to clear code, turn off the power for 10 seconds, press full open button  (B) or relevant button  (C) (within 3 seconds) while restart power 5 times, the lights will fast flash 6 times to confirm successful clearing code. regroup way is same as above "Matching Code and Group".

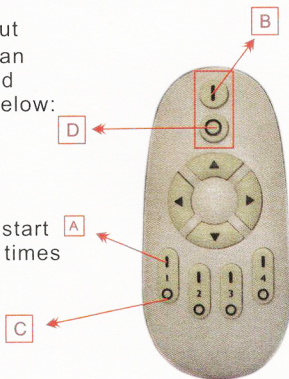

3. Mini night lamp function: long press the key  (D), all the lights will be in mini night lamp mode. Long press the grouping key  (C) can make the relevant lights in mini night light mode. Night light brightness is 2% of the maximum brightness.